



## Product Change Notice (PCN)

Date: 08/02/2024

PCN Number: PCN-0456183R-01

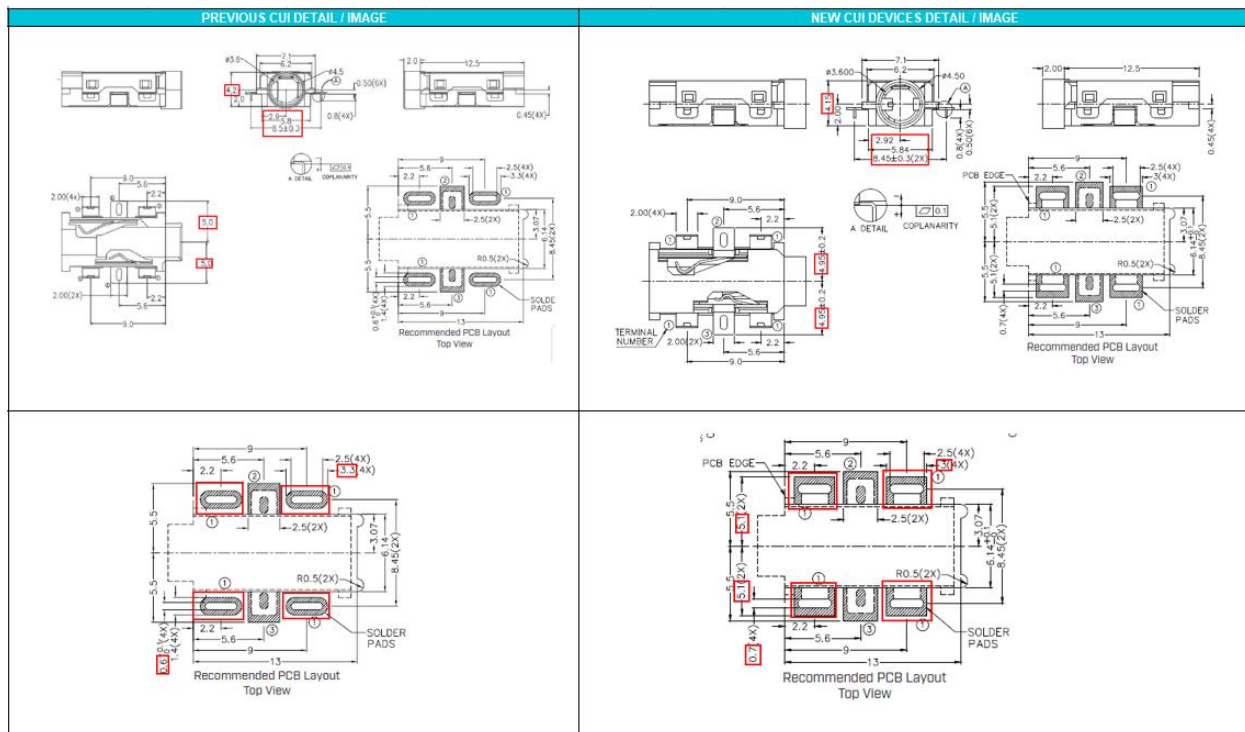
To Our Customers:

We appreciate your use of our products. Our commitment in maintaining and improving processes is demonstrated by plans to enhance our product quality, reliability, and manufacturability. The purpose of this notice is to inform you of a product change.

Product(s) Affected: *SJ-3502-SMT-TR*



Reason(s) for Change: *Manufacturing Improvement processes*

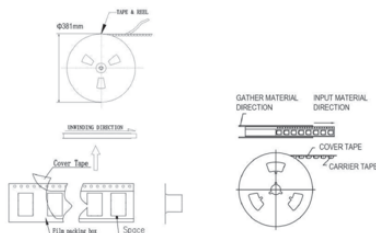
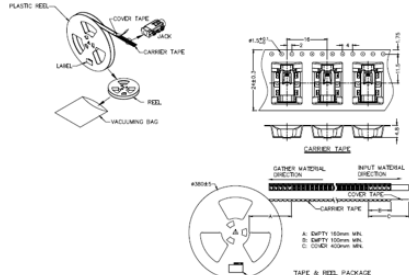
Description of Change: *New Factory Location. Product re-engineered for improved manufacturability and production yield. See image below for reference and check CUI Devices website for updated drawing. Cosmetic differences may be visible and not affect the form fit and function of the product.*



F-723-001

Revision: A

PREVIOUS CUI DETAIL / IMAGE				NEW CUI DEVICES DETAIL / IMAGE																																																															
<table border="1"> <thead> <tr> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>PLATING/COLOR</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>terminal 1</td> <td>stainless steel</td> <td>silver</td> <td></td> <td></td> <td></td> </tr> <tr> <td>terminal 2</td> <td>copper alloy</td> <td>silver</td> <td></td> <td></td> <td></td> </tr> <tr> <td>terminal 3</td> <td>copper alloy</td> <td>silver</td> <td></td> <td></td> <td></td> </tr> <tr> <td>housing</td> <td>PA6T (UL94V-D)</td> <td>black</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>				DESCRIPTION	MATERIAL	PLATING/COLOR				terminal 1	stainless steel	silver				terminal 2	copper alloy	silver				terminal 3	copper alloy	silver				housing	PA6T (UL94V-D)	black				<table border="1"> <thead> <tr> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>PLATING/COLOR</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>terminal 1</td> <td>stainless steel</td> <td>silver over nickel</td> <td></td> <td></td> <td></td> </tr> <tr> <td>terminal 2</td> <td>copper alloy</td> <td>silver over nickel</td> <td></td> <td></td> <td></td> </tr> <tr> <td>terminal 3</td> <td>copper alloy</td> <td>silver over nickel</td> <td></td> <td></td> <td></td> </tr> <tr> <td>housing</td> <td>PA10T (UL94V-D)</td> <td>black</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>				DESCRIPTION	MATERIAL	PLATING/COLOR				terminal 1	stainless steel	silver over nickel				terminal 2	copper alloy	silver over nickel				terminal 3	copper alloy	silver over nickel				housing	PA10T (UL94V-D)	black			
DESCRIPTION	MATERIAL	PLATING/COLOR																																																																	
terminal 1	stainless steel	silver																																																																	
terminal 2	copper alloy	silver																																																																	
terminal 3	copper alloy	silver																																																																	
housing	PA6T (UL94V-D)	black																																																																	
DESCRIPTION	MATERIAL	PLATING/COLOR																																																																	
terminal 1	stainless steel	silver over nickel																																																																	
terminal 2	copper alloy	silver over nickel																																																																	
terminal 3	copper alloy	silver over nickel																																																																	
housing	PA10T (UL94V-D)	black																																																																	
<p><b>SOLDERABILITY</b></p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>refl storage<sup>1</sup></td> <td>10-30°C, &lt;10% humidity</td> <td></td> <td></td> <td></td> <td>°C</td> </tr> <tr> <td>reflow soldering<sup>2</sup></td> <td>see reflow profile</td> <td>255</td> <td>260</td> <td></td> <td>°C</td> </tr> <tr> <td>drying conditions<sup>3</sup></td> <td>parts in reel: bake at 110°C for 4 hours parts removed from reel: bake at 110°C for 4 hours</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>Notes:  1. CUI Devices recommends to solder within 72 hours from opening vacuum packaging at a temperature &lt;30°C &amp; relative humidity &lt;65%.  2. When exceeding floor life by &gt;60 hours.</p> 				parameter	conditions/description	min	typ	max	units	refl storage <sup>1</sup>	10-30°C, <10% humidity				°C	reflow soldering <sup>2</sup>	see reflow profile	255	260		°C	drying conditions <sup>3</sup>	parts in reel: bake at 110°C for 4 hours parts removed from reel: bake at 110°C for 4 hours					<p><b>SOLDERABILITY</b></p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>refl storage<sup>1</sup></td> <td>at relative humidity &lt;60%</td> <td></td> <td></td> <td>40</td> <td>°C</td> </tr> <tr> <td>reflow soldering<sup>2</sup></td> <td>see reflow profile</td> <td>255</td> <td>260</td> <td>265</td> <td>°C</td> </tr> <tr> <td>drying conditions<sup>3</sup></td> <td>parts in reel: bake at 40°C ±5°C for 72 hours parts removed from reel: bake at 40°C ±5°C for 10 hours</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>Notes:  1. It is recommended to reflow solder within 72 hours from opening vacuum packaging at a temperature &lt;30°C &amp; relative humidity &lt;65%.  2. When exceeding floor life by &gt;70 hours.</p> 				parameter	conditions/description	min	typ	max	units	refl storage <sup>1</sup>	at relative humidity <60%			40	°C	reflow soldering <sup>2</sup>	see reflow profile	255	260	265	°C	drying conditions <sup>3</sup>	parts in reel: bake at 40°C ±5°C for 72 hours parts removed from reel: bake at 40°C ±5°C for 10 hours																
parameter	conditions/description	min	typ	max	units																																																														
refl storage <sup>1</sup>	10-30°C, <10% humidity				°C																																																														
reflow soldering <sup>2</sup>	see reflow profile	255	260		°C																																																														
drying conditions <sup>3</sup>	parts in reel: bake at 110°C for 4 hours parts removed from reel: bake at 110°C for 4 hours																																																																		
parameter	conditions/description	min	typ	max	units																																																														
refl storage <sup>1</sup>	at relative humidity <60%			40	°C																																																														
reflow soldering <sup>2</sup>	see reflow profile	255	260	265	°C																																																														
drying conditions <sup>3</sup>	parts in reel: bake at 40°C ±5°C for 72 hours parts removed from reel: bake at 40°C ±5°C for 10 hours																																																																		

PREVIOUS CUI DETAIL / IMAGE		NEW CUI DEVICES DETAIL / IMAGE	
<p><b>PACKAGING</b></p> <p>units: mm  Reel Size: Ø330 mm  Reel QTY: 1,000 pcs per reel</p> 		<p><b>PACKAGING</b></p> <p>units: mm  Reel Size: Ø300 mm  Reel QTY: 1,000 pcs per reel</p> 	

Affected Date Code: All orders placed before **10/25/2024** will be pre-PCN parts. Orders placed after **10/25/2024** will be manufactured in accordance with the PCN. Please check updated 2D drawing on or after **10/25/2024**.

PCN Approval:

Operations/Quality



Product Management

