CUI Devices is now Same Sky! Learn More

same sky

Additional Resources: Product Page | 3D Model

MODEL: CP080-30295 | DESCRIPTION: PELTIER MODULE

FEATURES

- arcTEC™ structure
- silicone sealed
- wide ΔT max
- low profile
- precise temperature control
- solid state construction

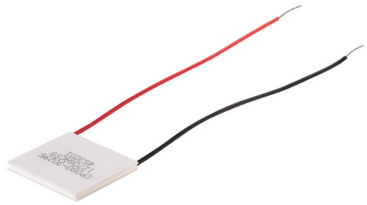

RoHS

SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
input voltage[1]				15.4	V
input current[2]				8	A
internal resistance[3]		1.37	1.52	1.67	Ω
Qmax[4]	Th = 27°C Th = 50°C			68 74	W W
ΔTmax[5]	Th = 27°C Th = 50°C			68 75	°C °C
solder melting temperature	connection between thermoelectric pairs	235			°C
assembly compression				1	MPa
hot side plate				100	°C
RoHS	yes				

Notes:
1. Maximum voltage at ΔT max and T_h=27°C
2. Maximum current to achieve ΔT max
3. Measured by AC 4-terminal method at 25°C
4. Maximum heat absorbed at cold side occurs at I_{max}, V_{max}, and ΔT=0°C
5. Maximum temperature difference occurs at I_{max}, V_{max}, and Q=0 W (ΔT max measured in a vacuum at 1.3 Pa)

MECHANICAL DRAWING

units: mm

ITEM	DESCRIPTION	MATERIAL	PLATING/COLOR
1	ceramic plate	96% AL_2O_3	white
2	sealer	silicon rubber 703 RTV (between cold and hot side plates)	
3	marking	P/N & S/N printed on cold side surface	
4	wire leads	22 AWG (200°C max)	tin
5	joint cover	silicon rubber 703 RTV	

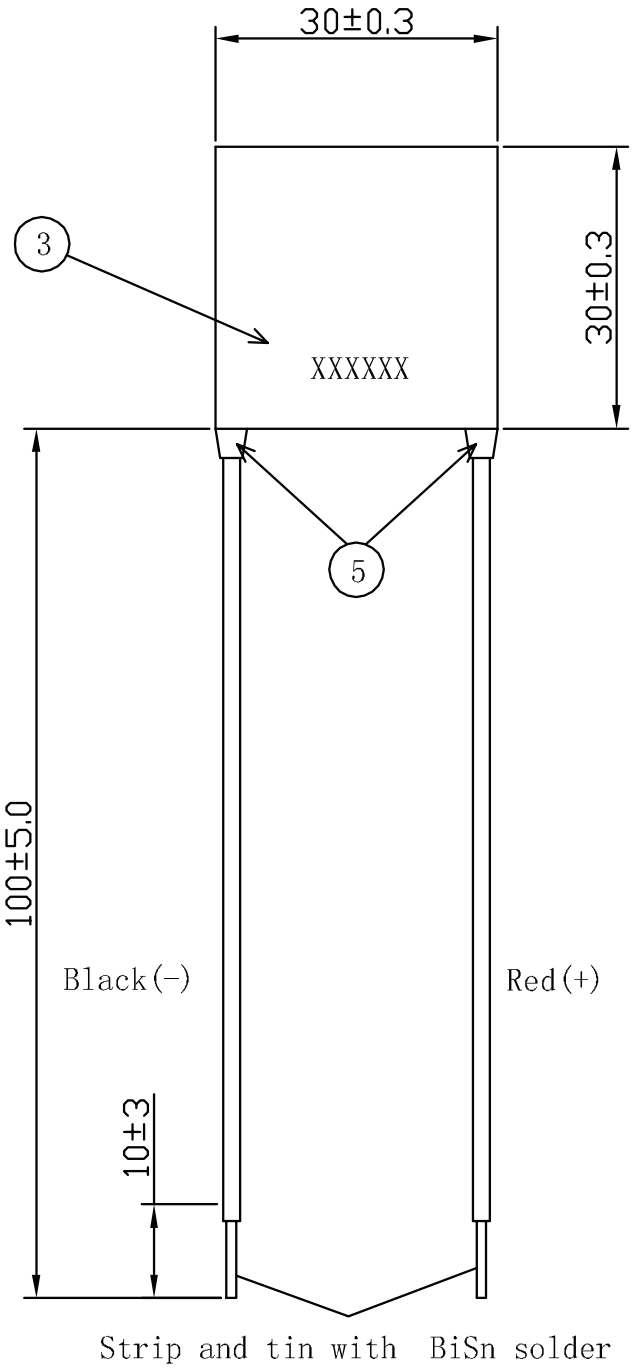

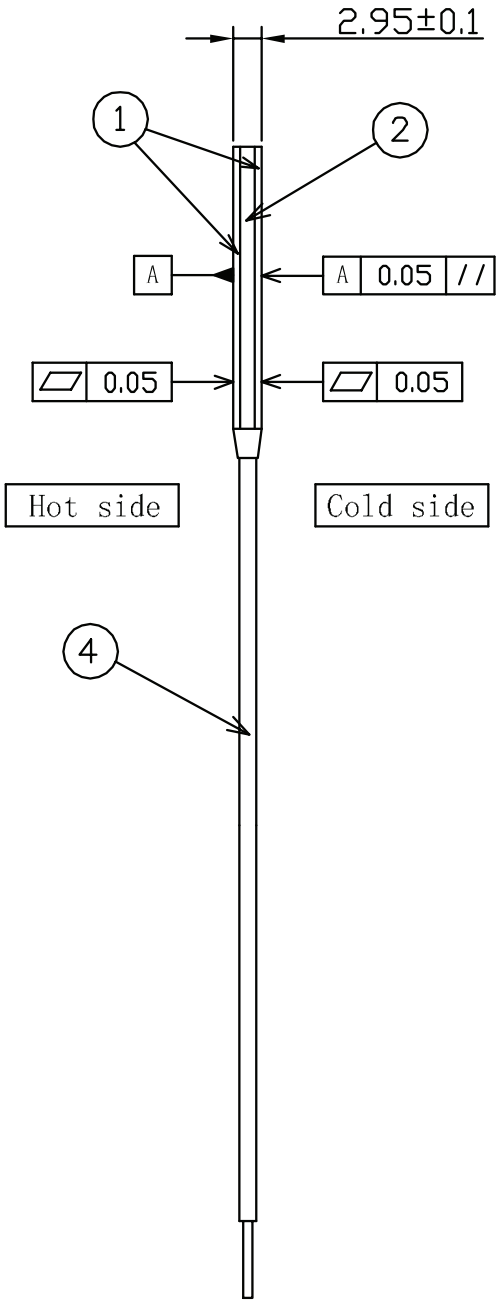

PERFORMANCE (Th=27°C)

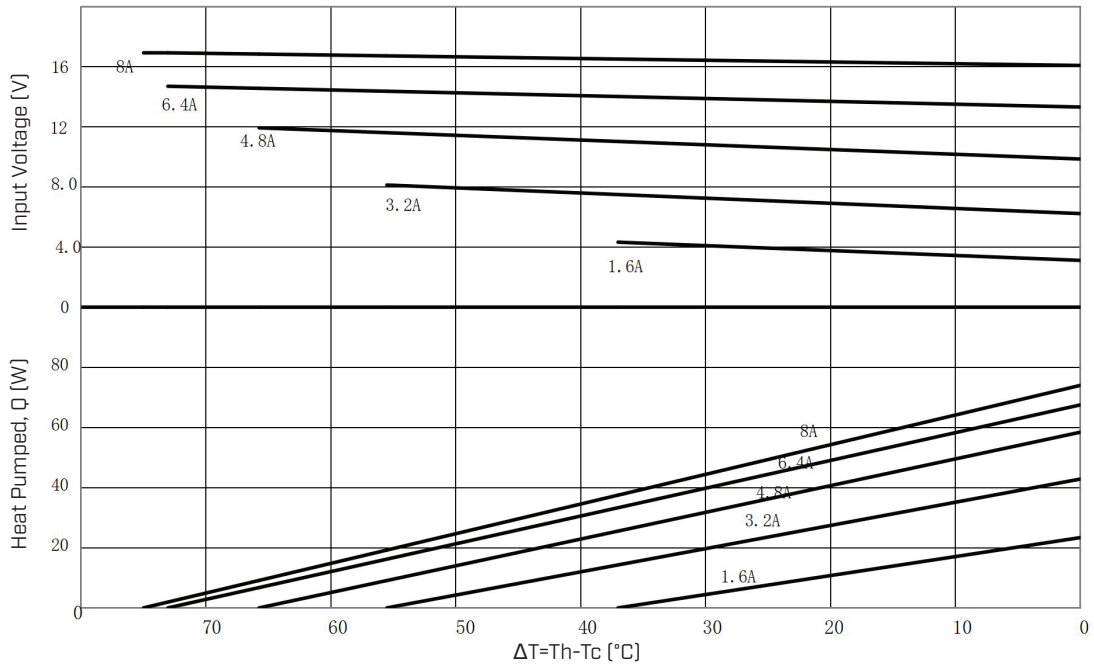

PERFORMANCE (Th=50°C)

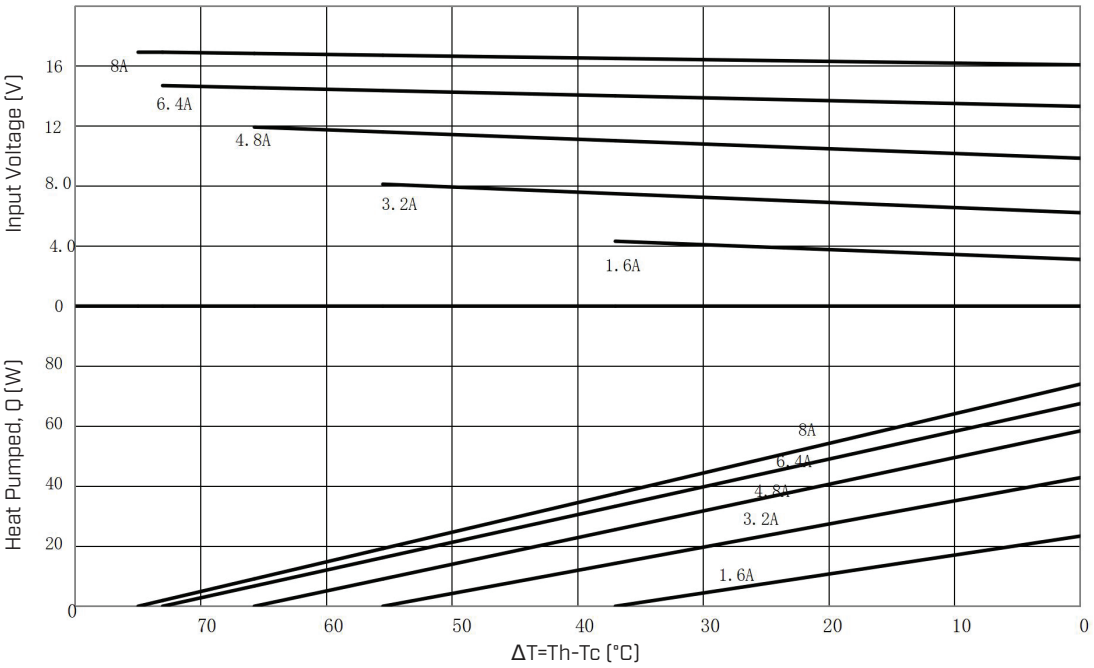

REVISION HISTORY

rev.	description	date
1.0	initial release	10/10/2024

The revision history provided is for informational purposes only and is believed to be accurate.

same sky

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

sameskydevices.com