

Additional Resources: Product Page

date 09/11/2024

page 1 of 3

MODEL: CPT-3010-95-L200 | DESCRIPTION: PIEZO BUZZER TRANSDUCER

FEATURES

- piezo
- 95 dB @ 0.1 m
- · screw holes for mounting





SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated voltage	Vp-p ★		12		Vp-p
operating voltage	0V			30	Vp-p
current consumption	at rated voltage, 3,300 Hz, square wave			20	mA
rated frequency			3,300		Hz
sound pressure level	at 10 cm, rated voltage, 3,300 Hz, ½ duty square wave	95			dB
electrostatic capacitance	at 100 Hz, 1 V	17,500	25,000	32,500	pF
dimensions	Ø30.0 x 10.0				mm
weight				7.0	g
material	PBT + 15% GF (black)				
terminal	wire leads				
operating temperature		-40		85	°C
storage temperature		-40		85	°C
washable	no				
RoHS	yes				

1. All specifications measured at $5\sim35$ °C, humidity at $45\sim85\%$, under $86\sim106$ kPa pressure, unless otherwise noted.

SOLDERABILITY


parameter	conditions/description	min	typ	max	units
hand soldering	for maximum 2 seconds	330		380	°C

MECHANICAL DRAWING


units: mm

tolerance: ±0.5 mm

wire: UL 1571, 28 AWG

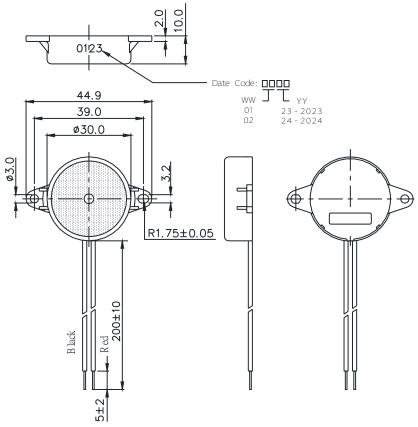

FREQUENCY RESPONSE CURVE

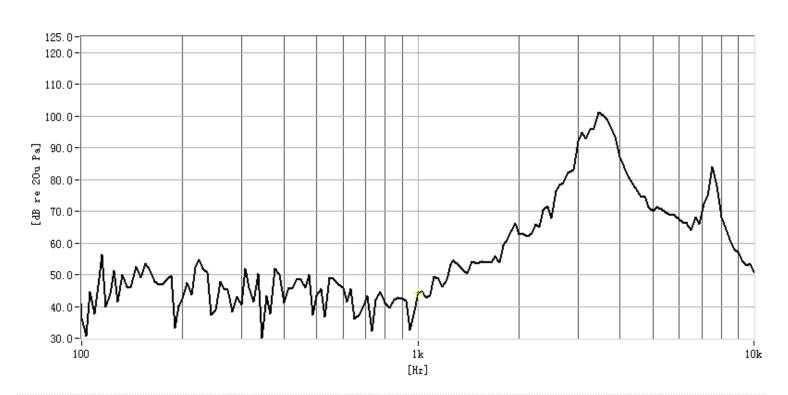

Additional Resources: Product Page

REVISION HISTORY

rev.	description	date
1.0	initial release	12/19/2023
1.01	CUI Devices rebranded to Same Sky	09/11/2024

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.