Additional Resources: Product Page



date 09/12/2024 page 1 of 3

MODEL: HSB42-353519P | DESCRIPTION: HEAT SINK

FEATURES

- BGA design
- push pins
- aluminum alloy
- clean finish



12

14

16



MODEL	thermal resistance ¹				power dissipation ¹
	@ 75°C ΔT, nat conv (°C/W)	@ 1 W, nat conv (°C/W)	@ 1 W, 200 LFM (°C/W)	@ 1 W, 400 LFM (°C/W)	@ 75°C ∆T, nat conv (W)
HSB42-353519P	9.16	12.1	2.6	1.7	8.18
Note: 1. Pag performance que las far full thermal registeres details					

140

Note: 1. See performance curves for full thermal resistance details.

PERFORMANCE CURVES

	Heatsink Temperature Rise Above Ambient (ΔT = Ths - Ta) (°C)				
Power (W)	Natural Conv.	200 LFM	400 LFM		
0	0	0	0		
1	12.1	2.6	1.7		
2	22.5	5.1	3.3		
3	32.3	7.6	5.1		
4	41.7	10.4	6.8		
5	50.5	13.0	8.5		
6	58.7	15.6	10.2		
7	66.1	18.2	11.9		
8	74.1	20.8	13.7		
9	81.5	23.4	15.5		
10	89.9	26.1	17.4		
11	97.1	28.7	19.3		
12	103.9	31.3	21.0		
13	110.0	34.0	22.7		
14	116.9	36.7	24.5		
15	124.0	39.4	26.1		

Mounting Surface Temperature Without Airflow Rise Above Ambient ("C) 120 200 LFM 100 400 LFM 80 60 40 20 0 0 2 6 8 10 4 Heat Dissipated (W)


Ths: "hot spot" temperature measured on the heatsink Ta: ambient temperature

.....

.....

MECHANICAL DRAWING

.....

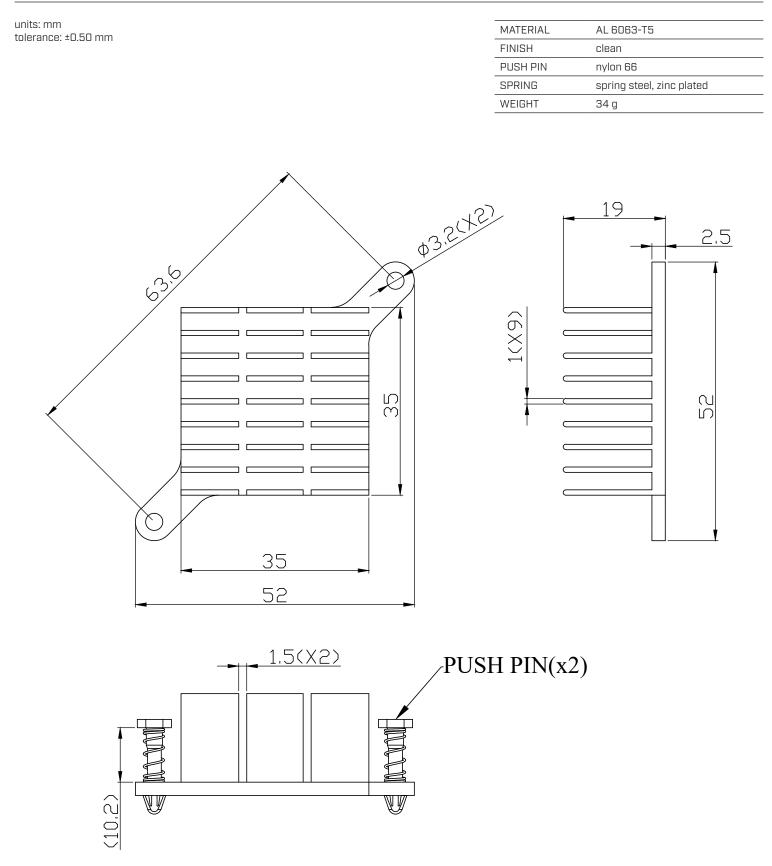

sameskydevices.com

REVISION HISTORY

rev.	description	date
1.0	initial release	03/01/2024
1.01	CUI Devices rebranded to Same Sky	09/12/2024

The revision history provided is for informational purposes only and is believed to be accurate.

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

same sky

.....

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.