

Additional Resources: Product Page

**date** 02/26/2025

page 1 of 5

## MODEL: MSIM-11-C | DESCRIPTION: MICRO SIM CARD CONNECTOR

#### **FEATURES**

- · micro SIM card connector
- hinged
- surface mount
- 8 pin
- 1.50 mm profile






### **SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rated voltage				50	V
rated current				0.5	А
contact resistance <sup>1</sup>				100	mΩ
insulation resistance	at 250 Vdc, between adjacent circuits	1,000			МΩ
voltage withstand	for 1 minute, between adjacent circuits		250		Vac
insertion force	at a rate of 25 mm/min			10	N
withdrawal force	at a rate of 25 mm/min	0.5			N
life			1,000		cycles
operating temperature		-20		85	°C
flammability rating	UL94V-0				
RoHS	yes				

Note: 1. When measured at 20 mV / 100 mA.

### **SOLDERABILITY**


parameter	conditions/description	min	typ	max	units
reel storage	at relative humidity 40~70% reel opened: use within 1 month reel unopened: up to 15 month shelf life	16	22	28	°C
reflow soldering	see reflow profile			250	°C



### **MECHANICAL DRAWING**

units: mm tolerance: X.X ±0.30 mm X.XX ±0.20 mm X.XXX ±0.10 mm unless otherwise specified

DESCRIPTION	MATERIAL	PLATING/COLOR
housing	LCP (UL94V-0)	black
contact terminals	copper alloy t=0.15 mm	contact area: gold over nickel solder area: gold flash over nickel
shell	SUS201 t=0.20 mm	clean

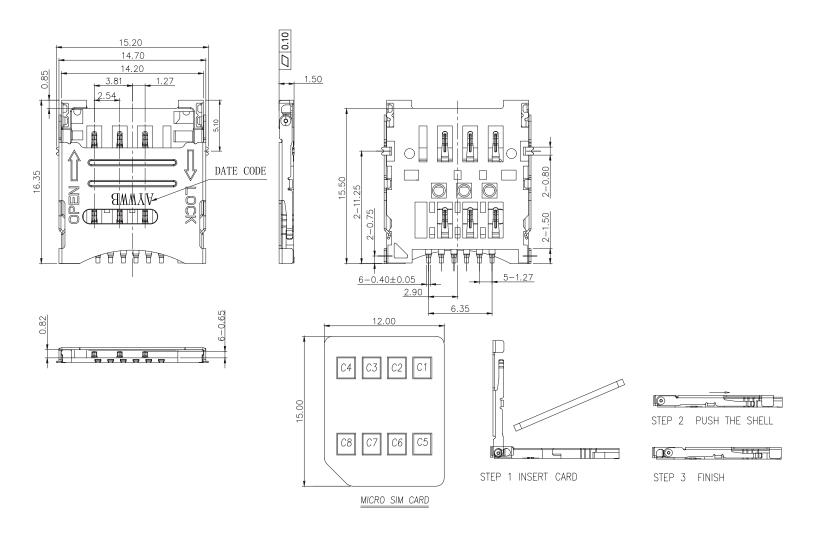


# **MECHANICAL DRAWING (CONTINUED)**

units: mm

PCB tolerance: ±0.05 mm

PIN CONNECTIONS			
PIN	SIGNAL NAME	DESCRIPTION	
C1	VCC	SUPPLY VOLTAGE	
C2	RST	RESETTING	
С3	CLK	CLOCK	
C4	-	RESERVED	
C5	GND	GROUND CONNECTION	
C6	VPP	PROGRAMMING VOLTAGE	
C7	1/0	DATA LINE	
C8	-	RESERVED	

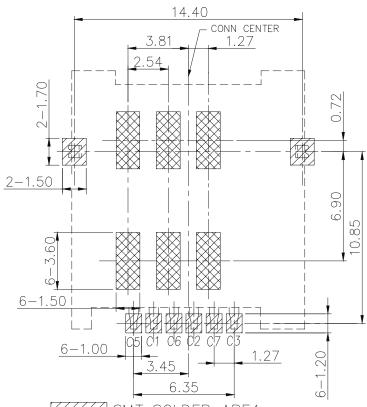

SMT SOLDER AREA


THIS AREA IS THE PRESSING AREA OF THE TERMINAL HEAD. THERE SHOULD NOT BE ANY LINES OR COPPER FOIL IN THIS AREA (AVOID AT LEASTTWO LAYERS OF BOARDS).

Recommended PCB Layout Top View

### **PACKAGING**

units: mm

Reel Size: Ø330 mm Reel QTY: 1,500 pcs per reel

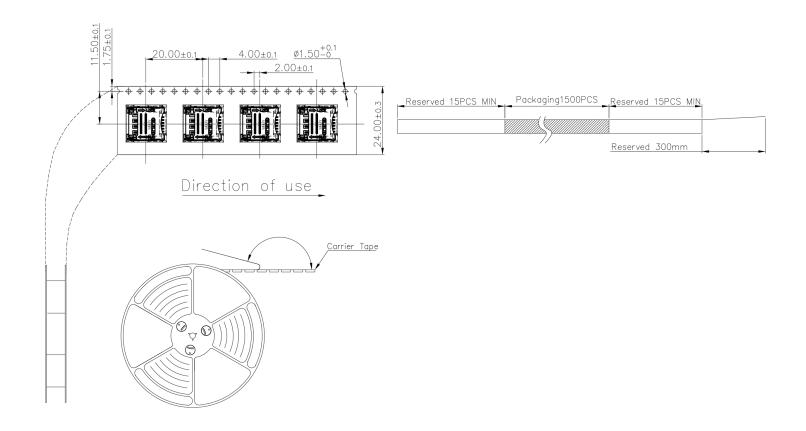

Additional Resources: Product Page

### **REVISION HISTORY**

rev.	description	date
1.0	initial release	02/26/2025

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.