Additional Resources: Product Page



date 02/26/2025 page 1 of 5

MODEL: MSIM-11-C | DESCRIPTION: MICRO SIM CARD CONNECTOR

FEATURES

- micro SIM card connector
- hinged
- surface mount
- 8 pin
- 1.50 mm profile





SPECIFICATIONS

| parameter | conditions/description | min | typ | max | units |
|---------------------------------|---|-------|-------|-----|--------|
| rated voltage | | | | 50 | V |
| rated current | | | | 0.5 | А |
| contact resistance ¹ | | | | 100 | mΩ |
| insulation resistance | at 250 Vdc, between adjacent circuits | 1,000 | | | MΩ |
| voltage withstand | for 1 minute, between adjacent circuits | | 250 | | Vac |
| insertion force | at a rate of 25 mm/min | | | 10 | N |
| withdrawal force | at a rate of 25 mm/min | 0.5 | | | N |
| life | | | 1,000 | | cycles |
| operating temperature | | -20 | | 85 | °C |
| flammability rating | UL94V-0 | | | | |
| RoHS | yes | | | | |
| Note: 1. When measured at 20 m | , | | | | |


SOLDERABILITY

| parameter | conditions/description | min | typ 22 | max 28 | units ℃ |
|------------------|---|-----|------------------|------------------|------------|
| reel storage | at relative humidity 40~70% reel opened: use within 1 month reel unopened: up to 15 month shelf life | 16 | | | |
| reflow soldering | see reflow profile | | | 250 | °C |
| | see reflow profile 250 200 200 $180^{\circ}C$ $40-60sec$ $40-60sec$ 50 50 50 100 150 200 250 300 | | | | |

.....

MECHANICAL DRAWING

.....

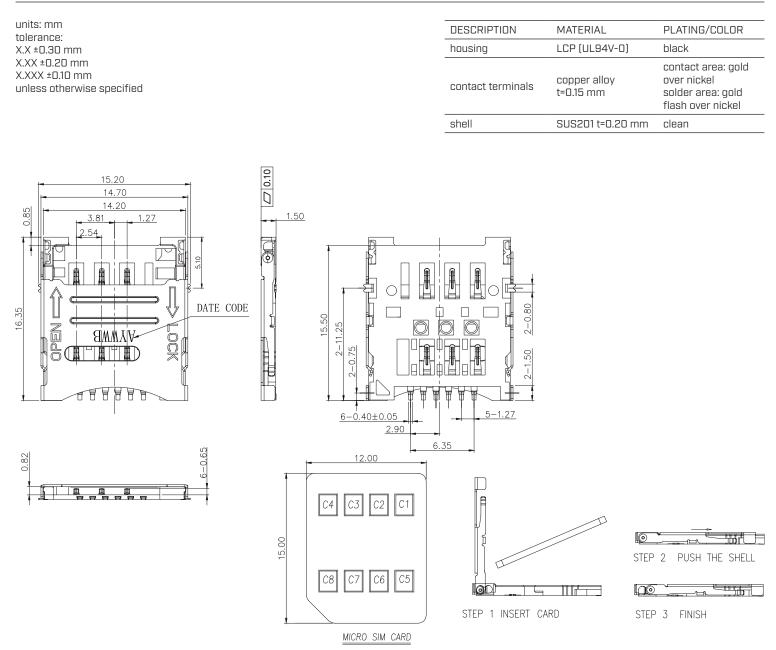


MECHANICAL DRAWING (CONTINUED)

units: mm PCB tolerance: ±0.05 mm

.....

| PIN CONNECTIONS | | | | |
|-----------------|----------------|---------------------|--|--|
| PIN | SIGNAL NAME | DESCRIPTION | | |
| C1 | VCC | SUPPLY VOLTAGE | | |
| C2 | RST | RESETTING | | |
| CЗ | CLK | CLOCK | | |
| C4 | - | RESERVED | | |
| C5 | GND | GROUND CONNECTION | | |
| C6 | VPP | PROGRAMMING VOLTAGE | | |
| C7 | 1/0 | DATA LINE | | |
| C8 | - | RESERVED | | |

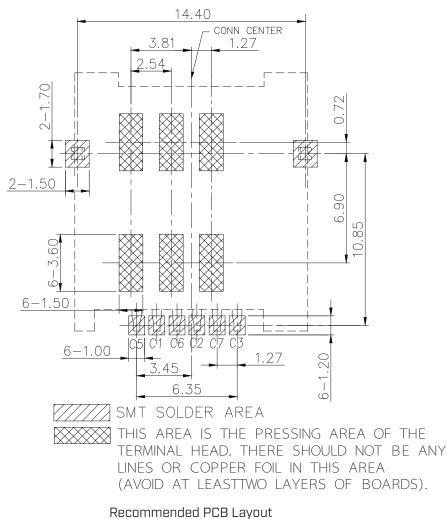


Top View

PACKAGING

.....

units: mm

Reel Size: Ø330 mm Reel QTY: 1,500 pcs per reel

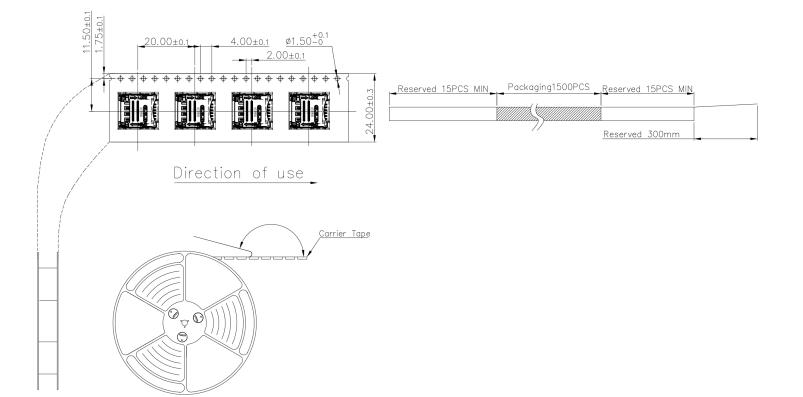

REVISION HISTORY

| rev. | description | date |
|------|-----------------|------------|
| 1.0 | initial release | 02/26/2025 |

The revision history provided is for informational purposes only and is believed to be accurate.

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

same sky

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.