Additional Resources: Product Page



date 02/25/2025 page 1 of 5

MODEL: NSIM-14-C | DESCRIPTION: NANO SIM CARD CONNECTOR

FEATURES

- nano SIM card connector
- hinged
- surface mount
- 6 pin
- 1.45 mm profile





SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated voltage				30	V
rated current				0.5	А
contact resistance ¹				100	mΩ
insulation resistance	at 500 Vdc, between adjacent circuits	1,000			MΩ
voltage withstand	for 1 minute, between adjacent circuits		500		Vdc
insertion force	at a rate of 25 mm/min			10	N
withdrawal force	at a rate of 25 mm/min	0.5			N
life			1,000		cycles
operating temperature		-40		85	°C
flammability rating	UL94V-0				
RoHS	yes				
Note: 1. When measured at 20 m ³	V / 100 mA.				

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
reel storage	at relative humidity 40~70% reel opened: use within 1 month reel unopened: up to 15 month shelf life		22	28	°C
reflow soldering	see reflow profile			250	°C
	180°C- 180°C- 180°C- 90~120sec 50 50 50 100 150 200 Time (s)	<u>MAX 250C</u> <u>40-60sec</u> 250 300			

2-3.18

2-1.91

2-0.64

 \pm

O

20

 $(\bigcirc$

0

4-1.20±0.10

ъR

ĊL

0

6


Þ

Ho ok

MECHANICAL DRAWING

units: mm tolerance: X.X ±0.30 mm X.XX ±0.20 mm X.XXX ±0.10 mm unless otherwise specified

DESCRIPTION	MATERIAL	PLATING/COLOR
housing	LCP (UL94V-0)	black
contact terminals	copper alloy t=0.15 mm	contact area: gold flash over nickel solder area: gold flash over nickel
shell	SUS201 t=0.20 mm	clean

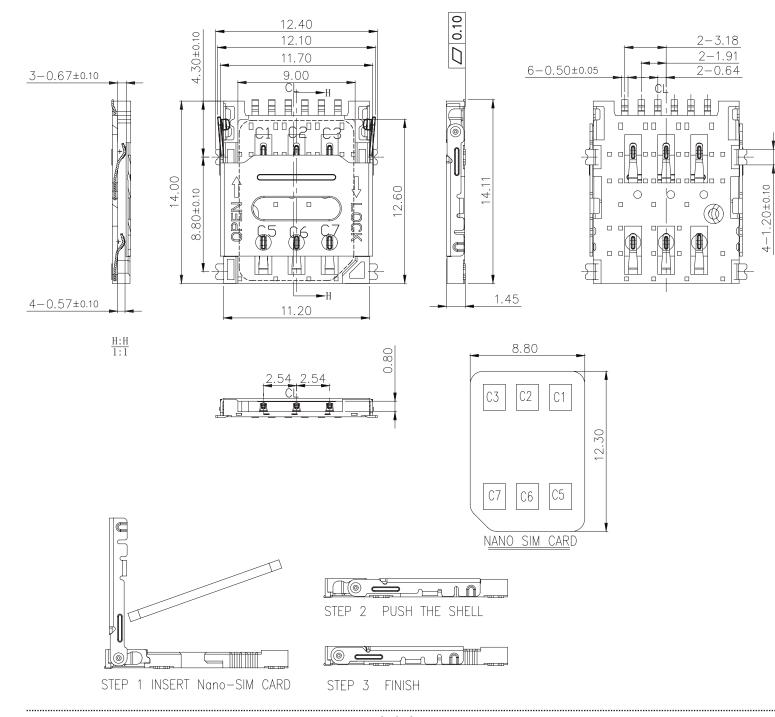


sameskydevices.com

MECHANICAL DRAWING (CONTINUED)

units: mm PCB tolerance: ±0.05 mm

.....

PIN CONNECTIONS			
PIN	SIGNAL NAME	DESCRIPTION	
C1	VCC	SUPPLY VOLTAGE	
C2	RST	RESETTING	
СЗ	CLK	CLOCK	
C5	GND	GROUND CONNECTION	
C6	VPP	PROGRAMMING VOLTAGE	
C7	1/0	DATA LINE	
GND	-	COVER GROUND	

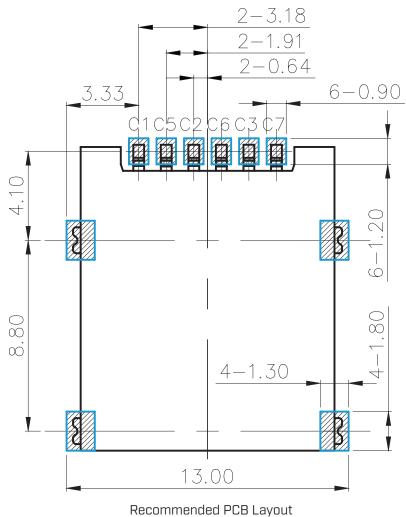


Top View

PACKAGING

units: mm

Reel Size: Ø330 mm Reel QTY: 1,500 pcs per reel

.....

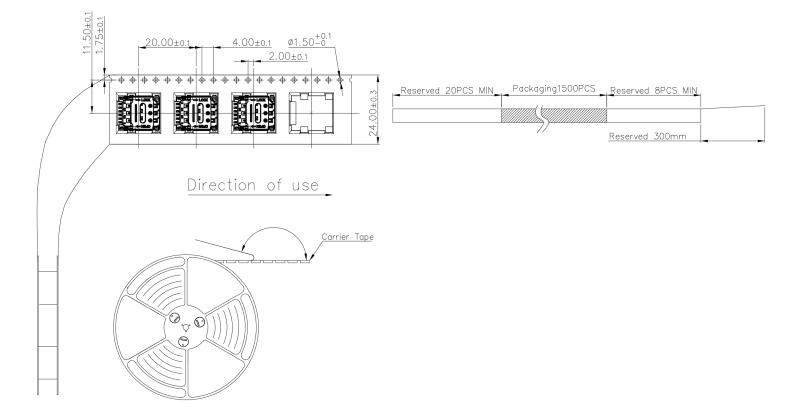

REVISION HISTORY

rev.	description	date
1.0	initial release	02/25/2025

The revision history provided is for informational purposes only and is believed to be accurate.

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

same sky

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.