Additional Resources: Product Page



date 02/25/2025 page 1 of 5

MODEL: NSIM-15-C | DESCRIPTION: NANO SIM CARD CONNECTOR

FEATURES

- nano SIM card connector
- hinged
- surface mount
- 6 pin
- 1.45 mm profile





SPECIFICATIONS

conditions/description	min	typ	max	units
			30	V
			0.5	А
			100	mΩ
at 500 Vdc, between adjacent circuits	1,000			MΩ
for 1 minute, between adjacent circuits		500		Vdc
at a rate of 25 mm/min			10	N
at a rate of 25 mm/min	0.5			N
		1,000		cycles
operating temperature			85	°C
UL94V-0				
Ves				
-	at 500 Vdc, between adjacent circuits for 1 minute, between adjacent circuits at a rate of 25 mm/min at a rate of 25 mm/min UL94V-0	at 500 Vdc, between adjacent circuits 1,000 for 1 minute, between adjacent circuits 1 at a rate of 25 mm/min 0.5	at 500 Vdc, between adjacent circuits 1,000 for 1 minute, between adjacent circuits 500 at a rate of 25 mm/min 0.5 at a rate of 25 mm/min 1,000 40 -40	30 0.5 100 at 500 Vdc, between adjacent circuits 1,000 for 1 minute, between adjacent circuits 500 at a rate of 25 mm/min 10 at a rate of 25 mm/min 0.5 1,000 1,000 -40 85 UL94V-0 10

SOLDERABILITY

parameter	conditions/description min typ		typ	typ max	
reel storage	at relative humidity 40~70% reel opened: use within 1 month reel unopened: up to 15 month shelf life	16 life		28	°C
reflow soldering	see reflow profile			250	°C
	150 150 100 50 100 100 150 200 Time (s)	<u>MAX 250°</u> 			

sameskydevices.com

DESCRIPTION

housing

MATERIAL

LCP (UL94V-0)


.....

PLATING/COLOR

black

MECHANICAL DRAWING

units: mm tolerance: X.X ±0.30 mm X.XX ±0.20 mm X.XXX ±0.20 mm unless otherwise specified

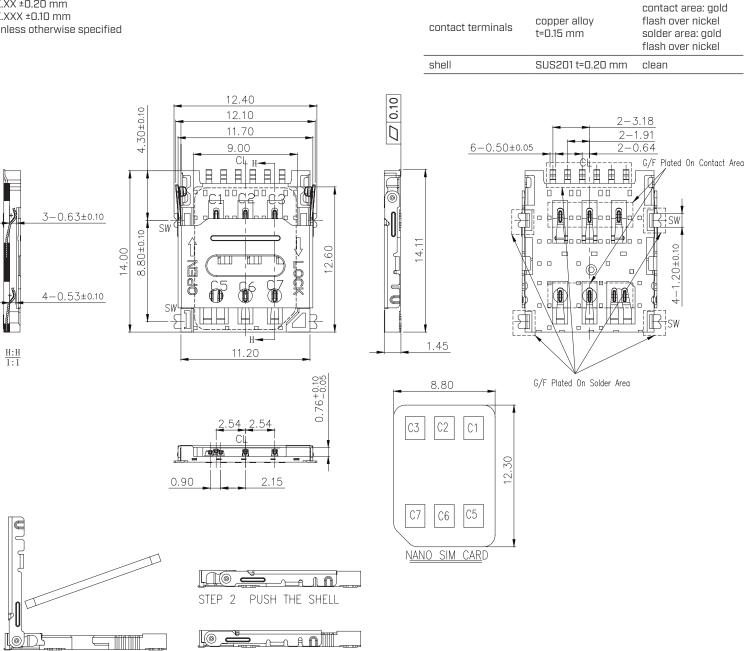

STEP 1 INSERT Nano-SIM CARD

.....


STEP 3 FINISH


MECHANICAL DRAWING (CONTINUED)

units: mm PCB tolerance: ±0.05 mm

.....

	PIN CONNECTIONS				
PIN	SIGNAL NAME	DESCRIPTION			
C1	VCC	SUPPLY VOLTAGE			
C2	RST	RESETTING			
C3	CLK	CLOCK			
C5	GND	GROUND CONNECTION			
C6	VPP	PROGRAMMING VOLTAGE			
C7	I/O	DATA LINE			
CD	-	CARD DETECT SWITCH			
GND	-	COVER GROUND			



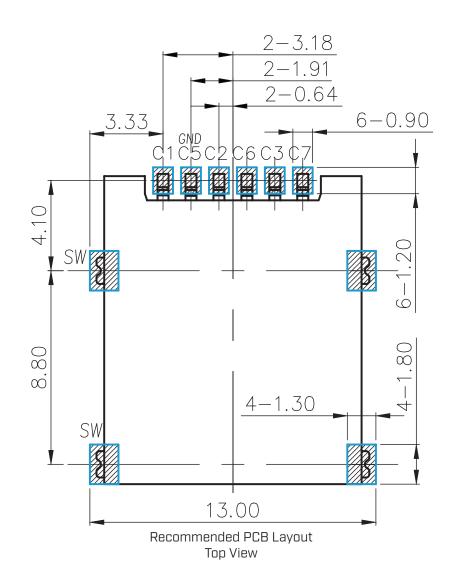


PACKAGING

.....

units: mm

Reel Size: Ø330 mm Reel QTY: 1,500 pcs per reel

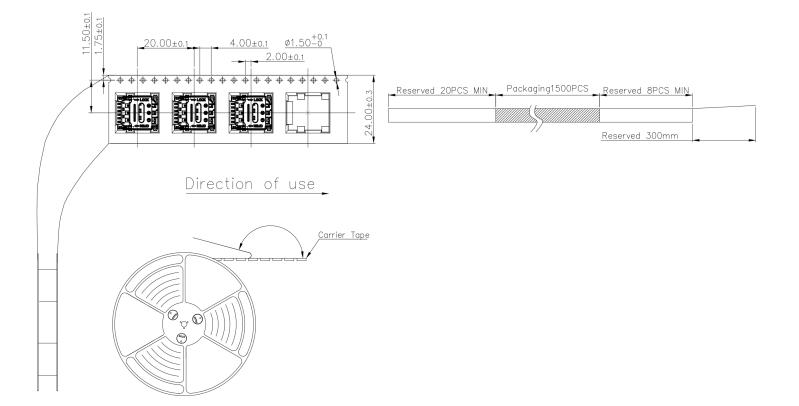

sameskydevices.com

.....

REVISION HISTORY

rev.	description	date
1.0	initial release	02/25/2025

The revision history provided is for informational purposes only and is believed to be accurate.

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

same sky

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.