CUI Devices is now Same Sky! Learn More

SERIES: PRY4 | DESCRIPTION: POWER RELAY

FEATURES

- 40 A
- epoxy sealed
- class F

MODEL

MODEL	coil voltage typ (Vdc)	coil resistance (Ω±10%)	operating voltage min (Vdc)	release voltage max (Vdc)	coil power typ (W)
PRY4-5V-900	5	28	3.75	0.25	0.90
PRY4-9V-900	9	90	6.75	0.45	0.90
PRY4-12V-900	12	160	9.00	0.60	0.90
PRY4-18V-900	18	360	13.50	0.90	0.90
PRY4-24V-900	24	640	18.00	1.20	0.90

Notes:
1. Maximum voltage is 130% of nominal voltage.
2. Coil temperature rise 70 K max.
3. All specifications are measured at 23±5°C, RH 25~75% unless otherwise specified.

PART NUMBER KEY

PRY4 - XX - 900 - XX - X F

- Base Number
- Coil Voltage (Vdc):
  - 5V = 5
  - 9V = 9
  - 12V = 12
  - 18V = 18
  - 24V = 24
- Contact Form:
  - 1A = 1 Form A
  - 1C = 1 Form C
- Sealing:
  - “blank” = Flux Protection
  - E = Epoxy Sealed

CONTACT SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
contact form	1 Form A, 1 Form C				
contact material	Ag alloy				
contact rating	1 Form A 40 A @ 250 Vac NO				
	1 Form C 30/20 A @ 250 Vac NO/NC 30/10 A @ 28 Vdc NO/NC				
contact temperature rise	at contact max rating			50	K
max switching voltage				277	Vac
max switching current	1 Form A 1 Form C			40 30	A A
max switching power	1 Form A 1 Form C			11,080 8,310	VA VA
life	1 Form A electrical: at 250 Vac/40 A, 1 second on, 9 seconds off mechanical: 0.1 seconds on, 0.1 seconds off	50,000 1,000,000			operations operations
	1 Form C electrical: at 250 Vac/30/20 A NO/NC, 1 second on, 9 seconds off mechanical: 0.1 seconds on, 0.1 seconds off	100,000 1,000,000			operations operations

GENERAL SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
insulation resistance	at 500 Vdc	100			MΩ
dielectric strength	between open contacts for 1 minute between coil and contacts for 1 minute		1,500 2,500		Vac Vac
coil insulation system	Class F				
operate time				15	ms
release time				10	ms
shock resistance	endurance: 3 shocks in each XYZ direction misoperation: 3 shocks in each XYZ direction		1,000 100		m/s^2 m/s^2
vibration resistance	endurance: 10~55 Hz, 1.5 mm double amplitude for 2 hours misoperation: 10~55 Hz, 1.5 mm double amplitude for 5 minutes				
operating temperature		-40		105	°C
humidity		45		85	%RH
weight			24		g
safety approvals	UL/cUL 508				
flammability rating	UL94V-0				
RoHS	yes				
packaging	carton size: 354 x 252 x 193 mm carton QTY: 400 pcs per carton				

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
wave soldering	for max 5 seconds	255	260	265	°C

MECHANICAL DRAWING (1 FORM A)

units: mm
tolerance:
X≤1: ±0.20 mm
1<X≤5: ±0.3 mm
X>5 mm: ±0.4 mm
PCB: ±0.10 mm
unless otherwise noted

DESCRIPTION	MATERIAL	PLATING/COLOR
housing	PBT (UL94V-0)	black
terminals	copper alloy	tin
coil terminals	enameled wire	

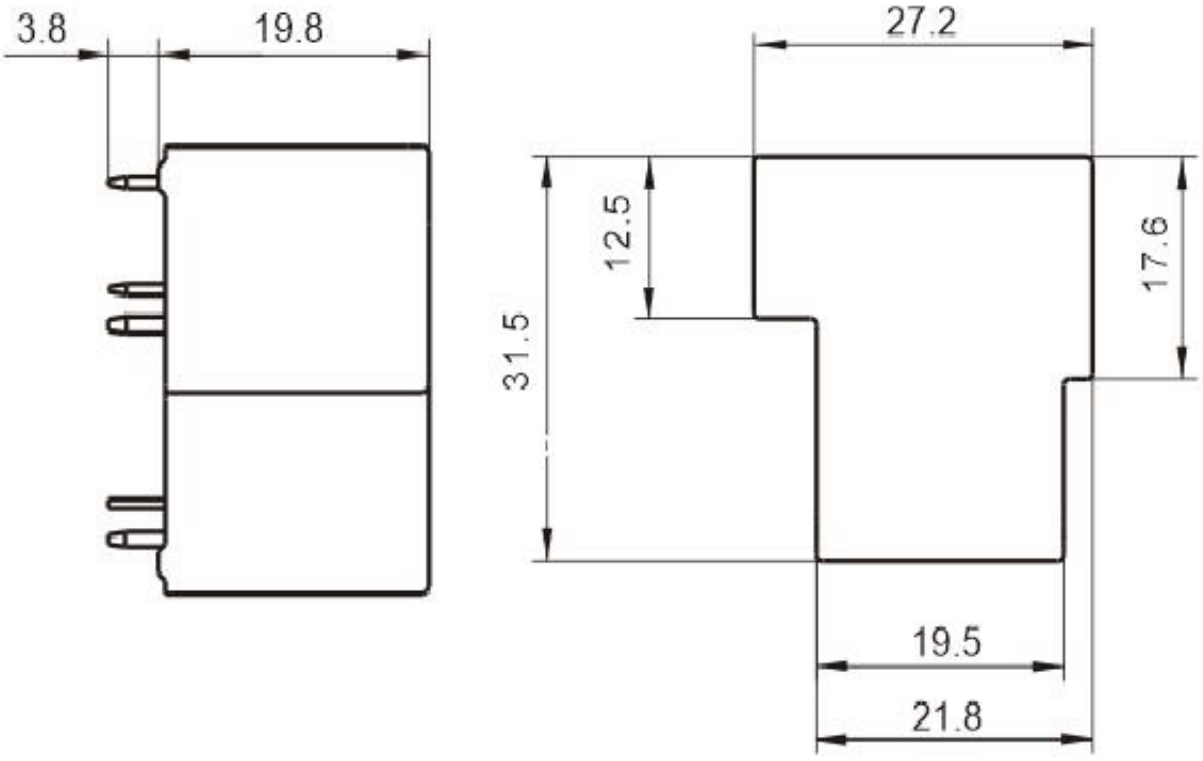

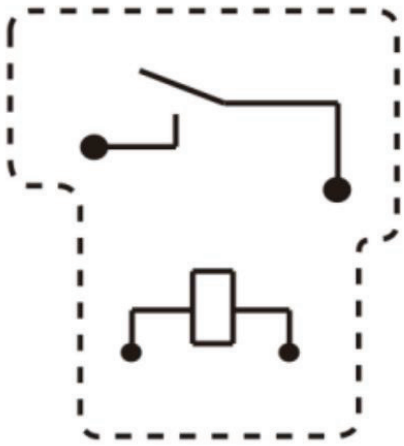

Wiring Diagram
Bottom View

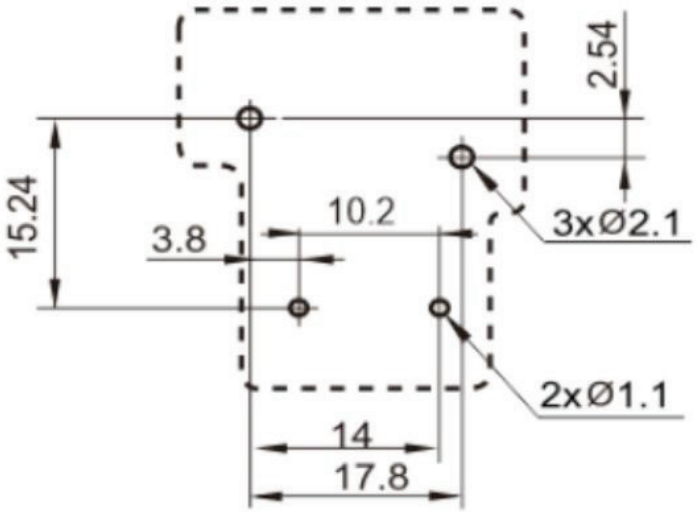

Recommended PCB Layout
Bottom View

MECHANICAL DRAWING (1 FORM C)

units: mm
tolerance:
X≤1: ±0.20 mm
1<X≤5: ±0.3 mm
X>5 mm: ±0.4 mm
PCB: ±0.10 mm
unless otherwise noted

DESCRIPTION	MATERIAL	PLATING/COLOR
housing	PBT (UL94V-0)	black
terminals	copper alloy	tin
coil terminals	enameled wire	

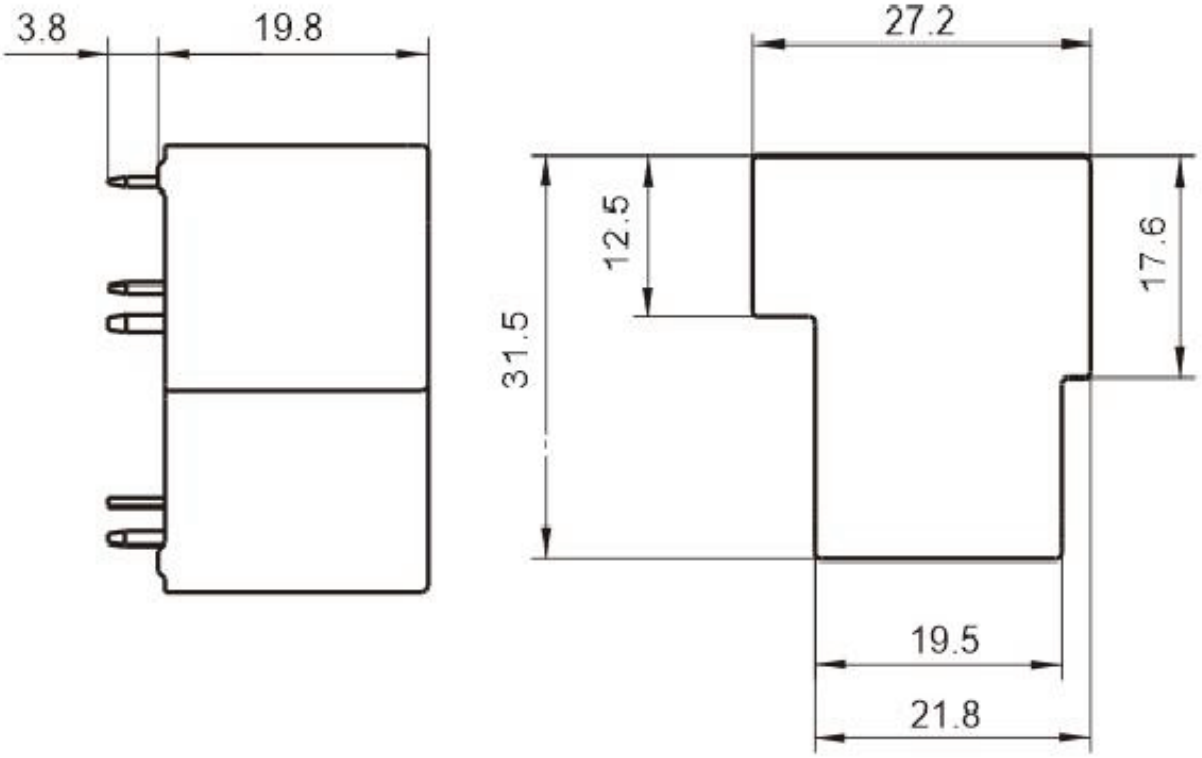

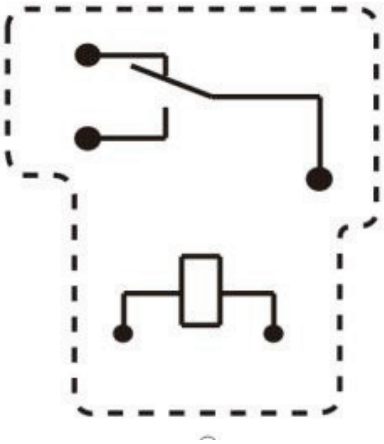

Wiring Diagram
Bottom View

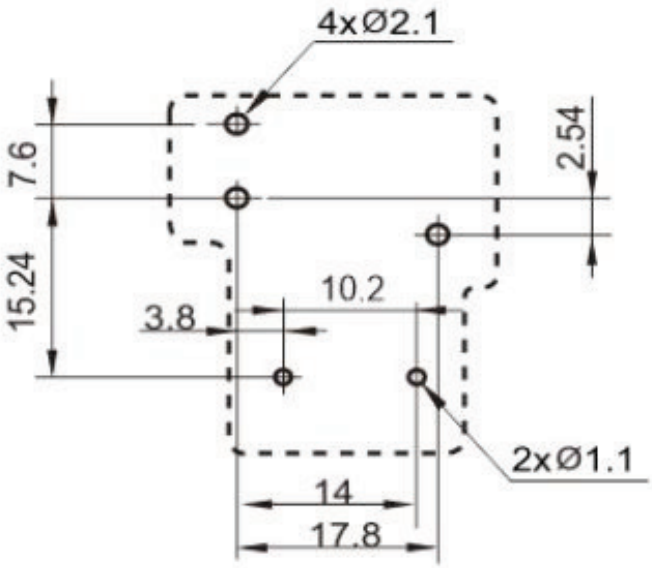

Recommended PCB Layout
Bottom View

REVISION HISTORY

rev.	description	date
1.0	initial release	10/06/2025

The revision history provided is for informational purposes only and is believed to be accurate.

same sky

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

sameskydevices.com