

Additional Resources: Product Page

date 09/12/2024

page 1 of 3

# SERIES: UP2-AH-TH | DESCRIPTION: USB PLUG


#### **FEATURES**

- · USB type A plug
- USB 2.0
- · horizontal orientation
- · through hole mounting





## **PART NUMBER KEY**

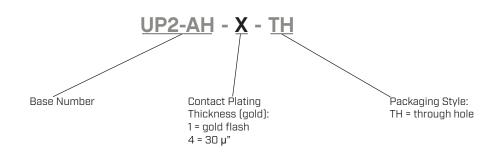

### **SPECIFICATIONS**

USB standard  rated input voltage  rated input current  contact resistance¹  between terminals and mating plug  insulation resistance  voltage withstand  for 1 minute		30 1.5	Vac
rated input current  contact resistance between terminals and mating plug  insulation resistance 1000			
contact resistance <sup>1</sup> between terminals and mating plug insulation resistance 1000		1.5	
insulation resistance 1000			Α
		30	mΩ
voltage withstand for 1 minute			МΩ
		500	Vac
insertion force		35	N
withdrawal force 10			N
operating temperature -20		85	°C
life	1,500		cycles
flammability rating UL94V-0			
RoHS yes			

Note:

- 1. When measured at 20 mV / 100 mA.
- 2. All specifications measured at 15-35°C, humidity at 25-85%, under atmospheric pressure of 86-106 kPa, unless otherwise noted.

### **SOLDERABILITY**

parameter	conditions/description	min	typ	max	units
wave soldering	dipped in solder pot for 5 ±0.5 seconds		240		°C

# **MECHANICAL DRAWING**


units: mm tolerance: X.X ±0.38 mm X.XX ±0.25 mm


2.0±0.05

 $4.55 \pm 0.10$ 

12.00±0.10	
	17.58±0.15

MATERIAL	PLATING
brass	contact: gold over nickel solder: tin over nickel
steel	nickel
LCP (black)	
	brass steel

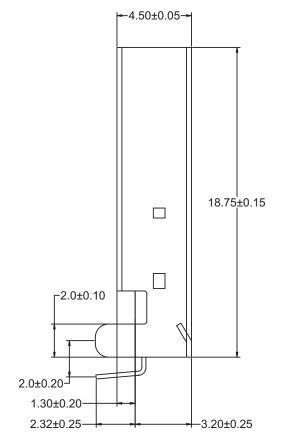




-7.00±0.10-

 $\phi$  0. 85  $\pm$  0. 10

 $-0.65\pm0.10$ 



Recommended PCB Layout

Top View

### **REVISION HISTORY**

rev.	description	date
1.0	initial release	08/05/2016
1.01	brand update	02/07/2020
1.02	housing tooling change	12/13/2021
1.03	added USB standard	04/07/2022
1.04	changed contact plating thickness of model UP2-AH-1-TH to be gold flash; logo, datasheet style update	08/24/2022
1.05	modified tooling	06/16/2023
1.06	CUI Devices rebranded to Same Sky	09/12/2024

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.